



# RANCILIO CLASSE 5 S

ENTRY-LEVEL TO MID RANGE TRADITIONAL ESPRESSO MACHINE



## ESPRESSO MACHINE SPECIFICATIONS

The Classe 5 exemplifies functional minimalism combined with contemporary aesthetics. It features modern side panels, curved group covers and an ergonomic work area for comfort and convenience. The intuitive brew group control buttons are designed for instant interaction between the barista and the machine.

The Classe 5 is the combination of modern style and contemporary art in an espresso machine. Made from brushed stainless steel, ABS and nylon panels, the Classe 5 has Soft Touch keypads for easy start and stop controls with white LED backlights. The Classe 5 comes in Standard or Compact and versions in Anthracite Black and Ice White. Discover functional minimalism with the Classe 5.

### CLASSE 5 S SIDE PANEL



## ESPRESSO MACHINE STANDARD FEATURES

- Made from brushed stainless steel, ABS and nylon panels
- Semi-Automatic brewing buttons - barista chooses when shot starts and stops
- Independent heat exchangers
- Electrical heating
- Built-in volumetric pump
- Boiler and pump pressure control gauge
- Two manual steam wands for frothing and steaming milk
- C-Lever ergonomically designed steam hand features two positions, pulse steam (down) or steam fully on (up)
- Hot water outlet with manual valve knob control
- Scratch-proof polymer drain insert that can be removed and easily cleaned in dishwasher
- Adjustable feet
- 1-year parts warranty

## ESPRESSO MACHINE OPTIONS

**YouSteam:** Barista assistance steam wand, adds air on-demand (Not available in 2 group compact)

**Electric Cup Warmer:** A special heating element with five levels of controlled heat on the top of the machine to keep ceramic cups hot (Not available in 2 group compact)

**Color Options:** Anthracite Black and Ice White

## ESPRESSO MACHINE STANDARD ACCESSORIES

- 1 Group - 1 double porta filters
- 2 Group - 2 double porta filters
- 3 Group - 3 double porta filters
- Plastic coffee tamper
- Rubber blind disks for cleaning
- User manual
- Foot extensions


## ESPRESSO MACHINE DATA SPECIFICATIONS

- Weight:
  - 106 lbs (2 Group Compact)
  - 122 lbs (2 Group)
  - 155 lbs (3 Group)
- Power Supply:
  - 208 - 220 V (2 Group Compact, 2 Group, and 3 Group)
- Power Rating:
  - 3000 W (2 Group Compact)
  - 4300 W (2 Group)
  - 6000 W (3 Group)



# RANCILIO CLASSE 5 S

ENTRY-LEVEL TO MID RANGE TRADITIONAL ESPRESSO MACHINE

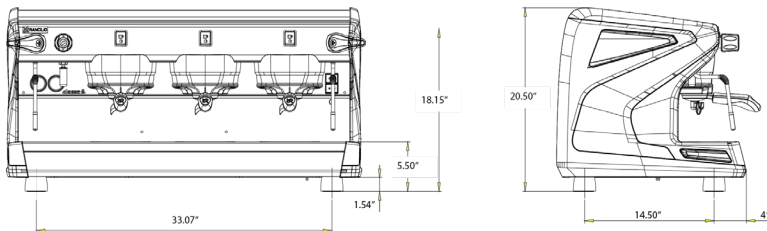

## COUNTER-TOP REQUIREMENTS

### 2 GROUP

Width: 31" Depth: 22" Height: 21" Weight: 122 lbs

### 2 GROUP COMPACT

Width: 24" Depth: 22" Height: 21" Weight: 106 lbs

### 3 GROUP

Width: 40" Depth: 22" Height: 21" Weight: 155 lbs

## SHIPPING DIMENSIONS AND WEIGHT

### 2 GROUP

Length: 35" Width: 26" Height: 29" Weight: 189 lbs

### 2 GROUP COMPACT

Length: 35" Width: 26" Height: 29" Weight: 173 lbs

### 3 GROUP

Length: 47" Width: 34" Height: 29" Weight: 222 lbs

CLASSE 5 SCRATCH PROOF DISHWASHER SAFE GRID SYSTEM



## SPACE REQUIREMENTS

Allow 1.5" of clearance on all sides of the machine.

Allow 24" x 5" of space for in-line filter. Filter can be mounted behind the machine or under the counter.

## SERVICE CONNECTIONS

### ELECTRICAL CONNECTIONS:

#### 2 GROUP COMPACT\*

Voltage Range: 208 - 220 V

Watts: 3000

Circuit Size: 20 amps

Suggested Receptacle:

NEMA 6-20R

#### 2 GROUP

Voltage Range: 208 - 220 V

Watts: 4300

Circuit Size: 20 amps

Suggested Receptacle:

NEMA 6-20R

#### 3 GROUP

Voltage Range: 208 - 220 V

Watts: 6000

Circuit Size: 30 amps

Suggested Receptacle:

NEMA L6-30R

\*2 Group Compact maybe ordered as a special order 110 V machine and a 2700 watt heat element.

PLEASE NOTE: Power can be installed under or above counter. Please allow 3.5" - 4" of space for the plug, especially when placing power above the counter and behind the machine.

### WATER CONNECTION:

Dedicated cold water access line with standard female 3/8" NPT fitting and manual shut-off valve within 4' of the machine.

### DRAIN REQUIREMENTS:

Open gravity drain with minimum 2" I.D. within 4' of the machine.

## WATER QUALITY STATEMENT

The fact that water is potable is no guarantee that it is suitable for espresso machines. Your water supply must be within these general guidelines:

**SUPPLY PRESSURE:** 30-70 psi

**HARDNESS:** 2-4 GPG\*

\*17.1 ppm = 1 grain of hardness

Water entering the machine should have a water hardness level of 2-4 GPG at all times. If the water supply is not within this range, a dedicated water softener (if above 4 GPG) or mineral addition cartridge (if below 2 GPG) is required for the espresso machine to operate properly over time (see Rancilio Group North America water quality statement for further details).